
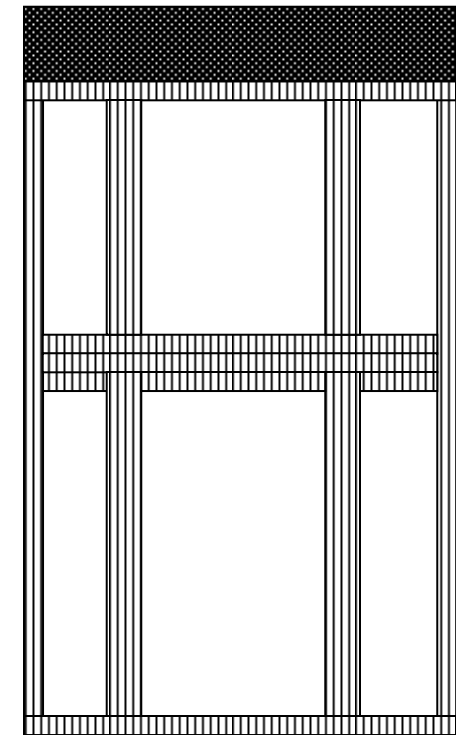


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROMATS, INC. AND ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF PROMATS,

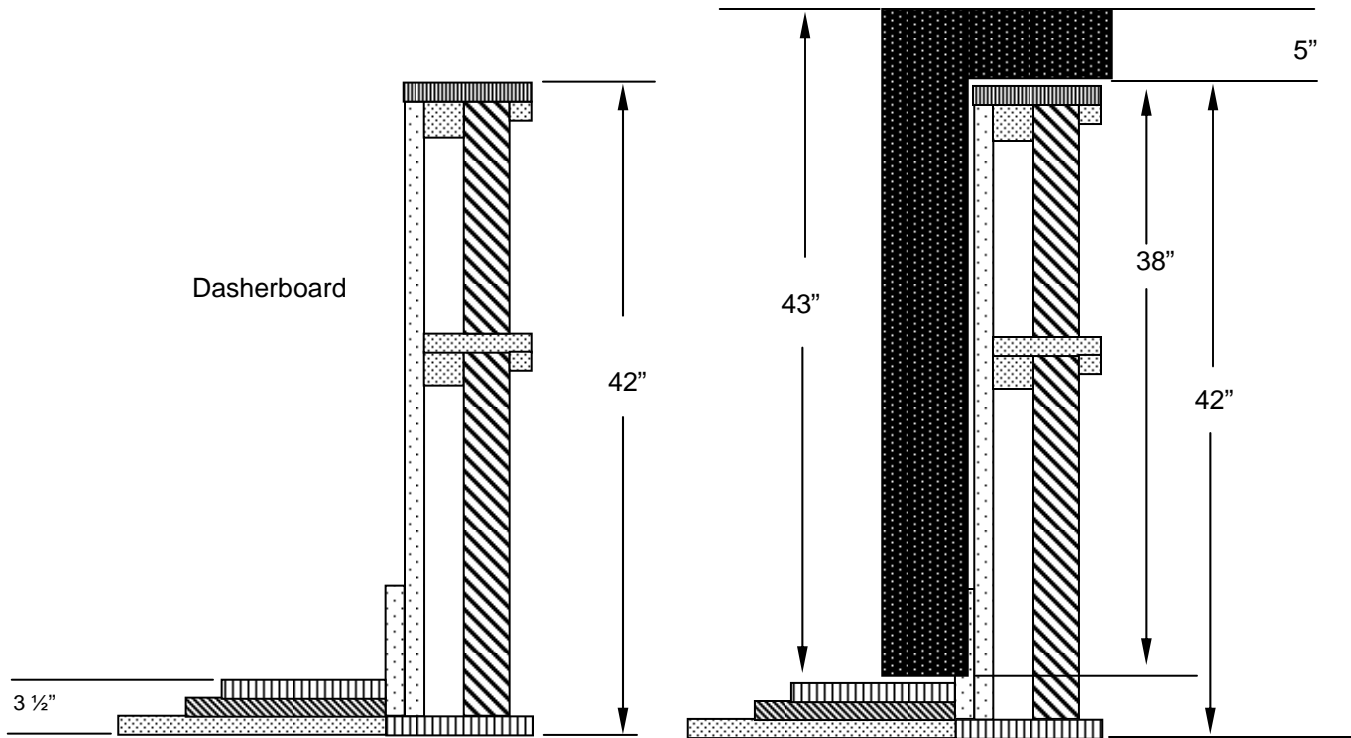

**Wall Padding Specifications:
Dashboard Pad**

Vinyl Covering: 14 oz. per sq. yard Leather Grain Appearance vinyl, Fabric: 1300 Denier Polyester Basic Fabric, Tear Strength: 92 x 83, Strip Tensile: 365 x 348, Anti-fungal, Class A flame retardant. Colors per manufacturer's standard selection, as selected by Architect. Vinyl cover is stitched using 6 lb. Bonded polyester thread, color: Black.

Vinyl Covering (Optional Upgrade): 18 oz. per sq. yard coated vinyl, unbalanced coating. Fabric: 1000 Denier Polyester Basic Fabric, Tongue Tear Strength Test: 100 lbs x 100 lbs; Grab Tensile Strength: 410 lbs x 410 lbs; Strip Tensile: 300 lbs x 300 lbs; UV resistance Not excessive fading after 300 hours, Cold Crack: Minus 40 degrees Fahrenheit. Colors per manufacturer's standard selection, as selected by Architect. Vinyl cover is stitched using 6 lb. Bonded polyester thread, color: Black.

Filler Foam for dashboard pads: Vertical component- Proethylene foam, Density: 1.2 pcf, Vertical Deflection 10%: 3.75 PSI, 25%: 5.6 PSI, Compression Set %- 24 hrs.: 25% or less, 158 degrees F Thermal Stability: < 5%, Water Absorption: < .2% & Horizontal Component- Polyurethane foam, Density: 1.5 – 1.7 lb./cu ft., Indention Load Deflection: 40 – 48 lbs., Tensile Strength: 10 psi min., Elongation: 125% min., Tear Strength: 1.25 lbs./LIN. min. Combo Foam Option: Polyethylene between the board and the polyurethane foam on both vertical and horizontal

Attachment: 2 1/2" Vinyl flap with Velcro or #2 grommets every 12" O.C. at top and bottom. Attached to dashboard using self-adhesive Velcro or concrete anchors or wood screws.

November 18, 2006

Dashboard Pad

NOT TO SCALE



Post Office Box 508
Fort Collins, CO 80522-0508
800-678-6287
FAX 970-482-7740

Drawn By: EPC

Drawing #: 1

Project Name: