


Promats Tapered Column Pads are designed with Top & Bottom surfaces Parallel to the floor, requiring angled manufacturing for correct fit.

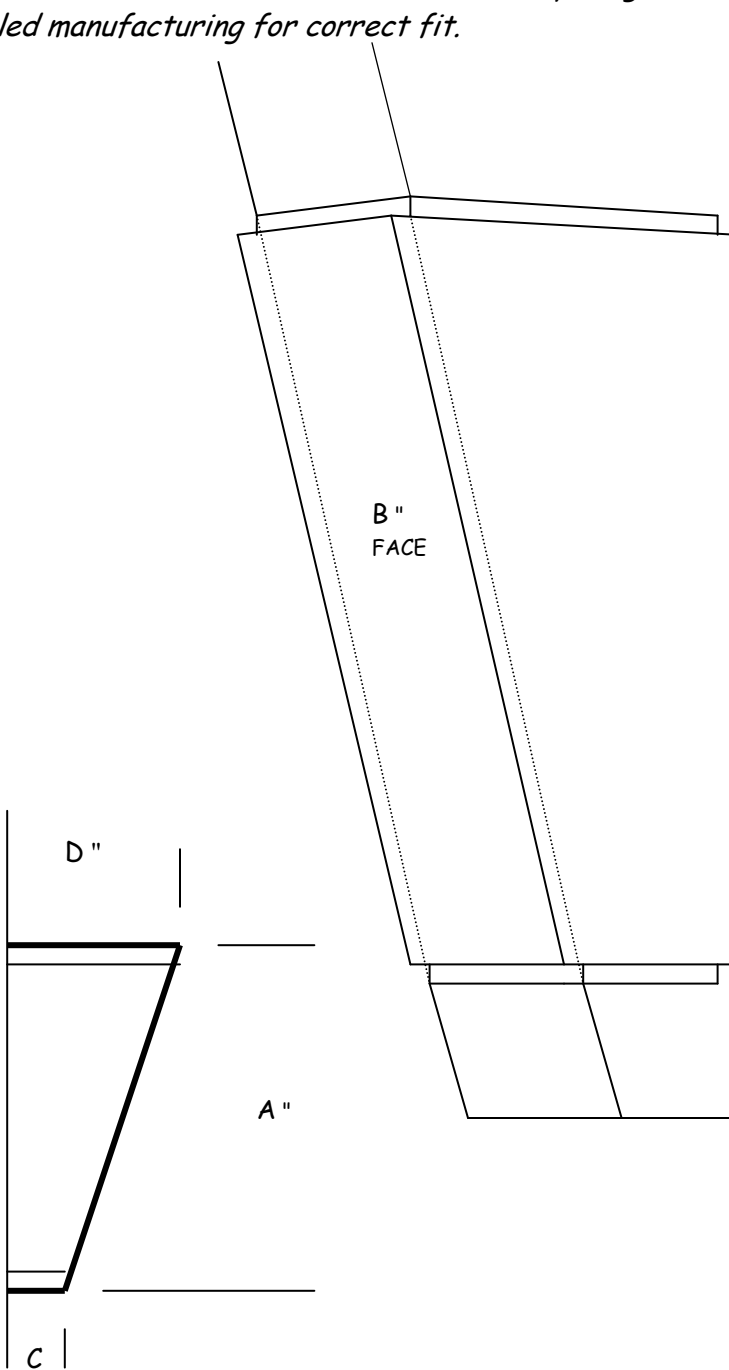

**Tapered Column Specifications:**  
**MODEL :** CP3THI  
**Plywood Backed Pads for Interior Use (WC) Application: Masonry or Wood Walls.**  
**Vinyl Cover:** 14 oz. Vinyl  
 Leather Grain appearance.  
 Vinyl. 1300 Denier Polyester Base Fabric.  
 Tear Strength 92 x 83  
 Strip Tensile 365 x 348  
 Anti-fungal,  
 Flame Resistant: Class A  
 Cover is wrapped around the backside of the plywood and is stapled every 3" with galvanized steel staples.  
**Plywood:** 7/16" OSB (Oriented Strand Board)  
 Exterior Exposure Durability Rating

**Attachment:** CP - 1" Fastening Lip  
 A 1" fastening lip at the top & bottom of the pad allows it to be mounted to the wall / column with the appropriate wood or masonry fastener.  
**Foam Core:** Glued to the plywood backing

CP3THI: 2" THICK ASTM F2440-04 High Impact Foam

COULD be made in two or more pieces according to size.



April 3, 2007

**Tapered Column  
 Model : CP3THI**

Not to Scale

Drawing 1 of 1

Revision:

**Post Office Box 508  
 Fort Collins, CO. 80522-0508  
 (970) 484-2500 800-678-6287  
 Facsimile: (970) 482-7740**

Drawn By: \_\_\_\_\_

D#: \_\_\_\_\_

Property of Promats, Inc. May not be reproduced without written permission.

Project Name: \_\_\_\_\_

\*