


Promats Tapered Column Pads are designed with Top & Bottom surfaces Parallel to the floor, requiring angled manufacturing for correct fit.

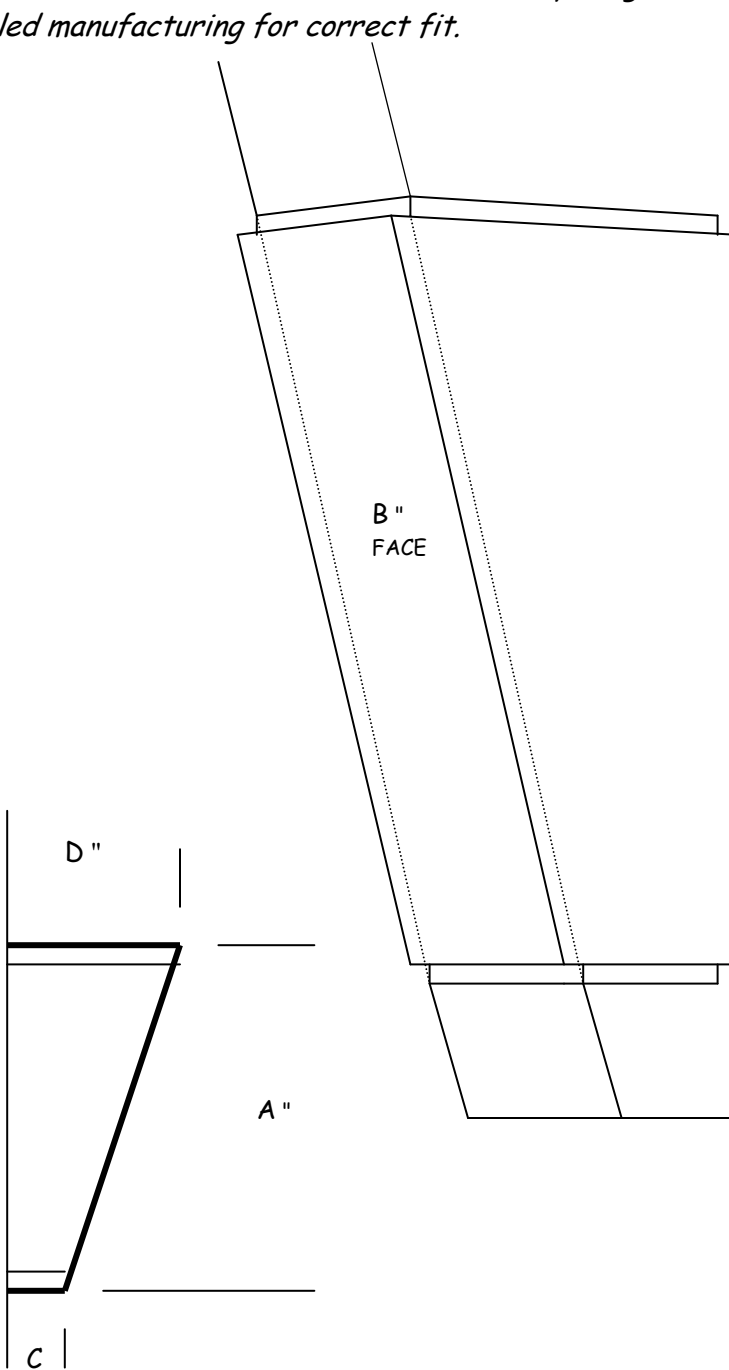

**Tapered Column Specifications:**  
**MODEL :** CP3TFR  
**Plywood Backed Pads for Interior Use (WC) Application: Masonry or Wood Walls.**  
**Vinyl Cover:** 14 oz. Vinyl, Leather Grain appearance.  
 Vinyl. 1300 Denier Polyester Base Fabric.  
 Tear Strength 93 x 83 Strip Tensile 365 x 348  
 Anti-fungal, Flame Resistant: Meets ASTM E84  
 Cover is wrapped around the backside of the plywood and is stapled every 3" with galvanized steel staples.  
**Plywood:** 7/16" Oriented Strand Board  
**Attachment:** One Pair of 18 ga. Galvanized metal "Z" Clips are used to mount the pads to the wall. "Z" Clips are mounted by 1/4" bolts screwed into threaded washer inserts. The wall "Z" Clips are fastened with an appropriate anchor (provided by installer) for each wall type. Z Clip on top and 1" lip on the bottom standard.  
**Foam Core:** Glued to the OSB backing NEOPRENE 2" Polychloroprene Latex Compound 45-65 ILD "firm"  
  
 COULD be made in two or more pieces according to size.

April 5, 2007

Tapered Column  
 Model : CP3TFR

Not to Scale

Drawing 1 of 1

Revision:



Post Office Box 508  
 Fort Collins, CO. 80522-0508  
 (970) 484-2500 800-678-6287  
 Facsimile: (970) 482-7740

Drawn By: \_\_\_\_\_

D#: \_\_\_\_\_

Property of Promats, Inc. May not be reproduced without written permission.

Project Name: \_\_\_\_\_

\*