
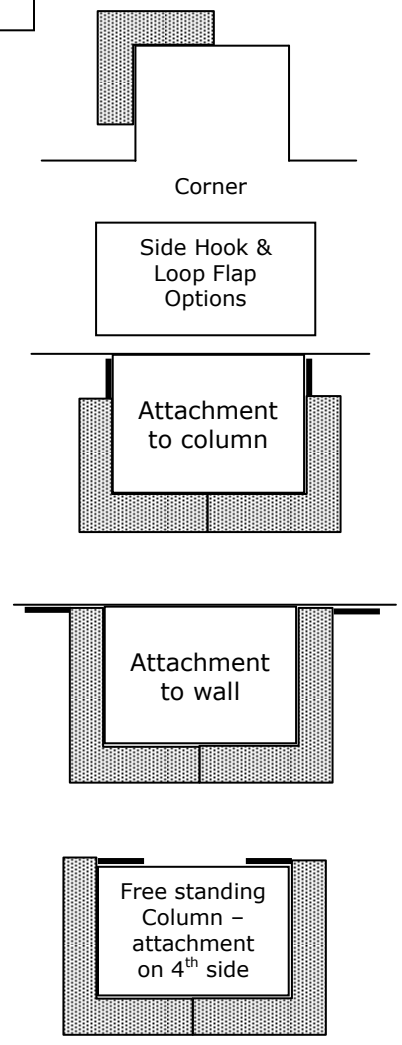
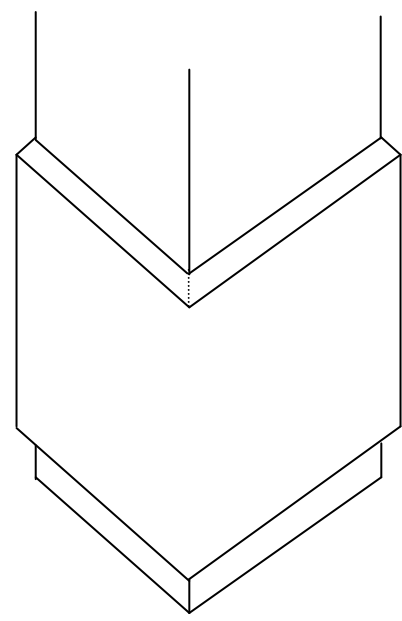


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROMATS, INC. AND ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF PROMATS, IS STRICTLY PROHIBITED.

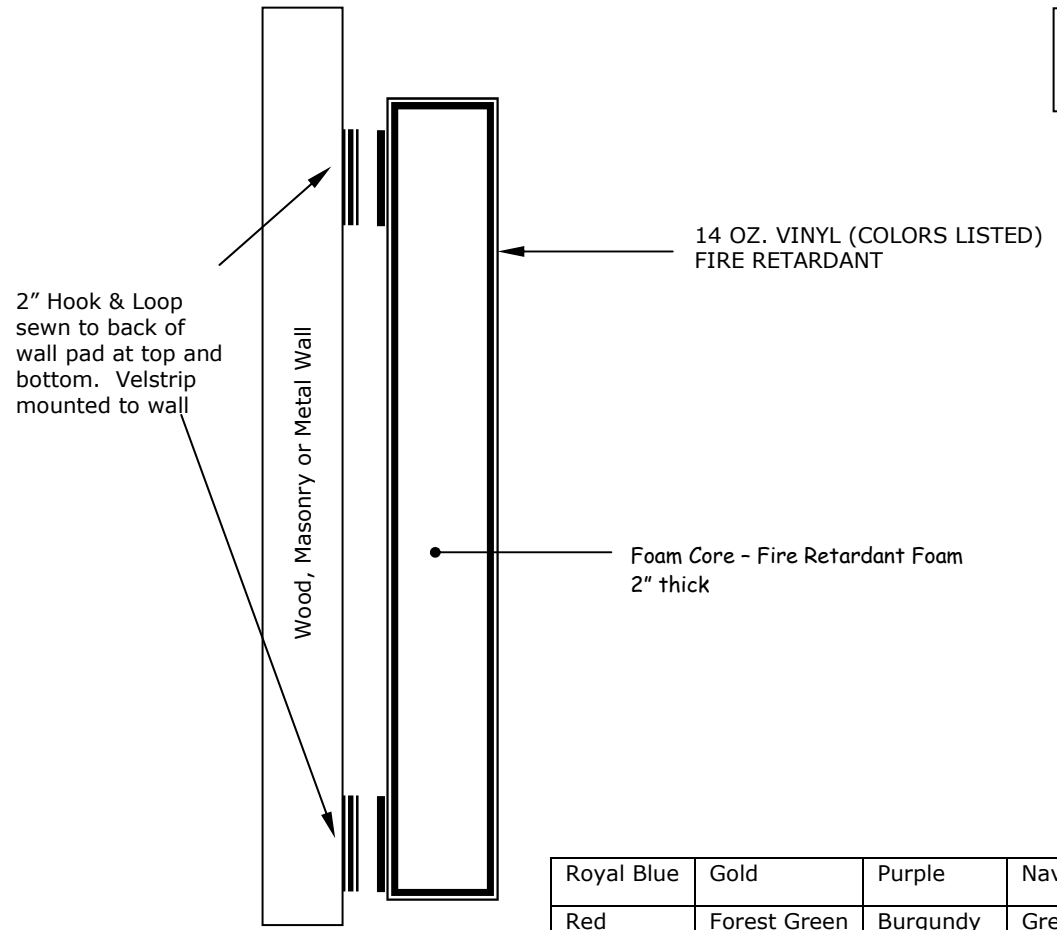

Royal Blue	Gold	Purple	Navy Blue	White	Kelly Green	Sky Blue
Red	Forest Green	Burgundy	Grey	Black	Orange	Camel

**Wall Padding Specifications:
Sewn Pads for Interior Use
Column Pad (CVFR)**

Application: Masonry or Wood Walls
Backing: 7/16" OSB (Oriented Strand Board)
Vinyl Covering: 14 oz. Vinyl, Leather Grain appearance, 1300 Denier Polyester Base Fabric, Tear Strength: 93 x 83, Strip Tensile: 365 x 348, Anti-fungal, Flame Resistant: Class A. Colors per manufacturer's standard selection, as selected by Architect. Vinyl cover is stitched using 6 lbs. bonded polyester thread, color: Black.
Filler Foam for Wall pads: Glued to the plywood backing Polychloroprene Latex Compound with exceptional absorption characteristics. 2" thick. Firm 45-65 ILD
Attachment: Velstrip - 20 gauge metal within Vinyl Sleeve (Color to match wall pad) attached to the wall. Velcro flaps at sides optional.

April 5, 2007

Interior Wall Pad
Sewn Column Pad (CVFR)

NOT TO SCALE



Post Office Box 508
Fort Collins, CO 80522-0508
800-678-6287
FAX 970-482-7740

Drawn By: _____
 Drawing #: _____
 Project Name: _____