


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PROMATS, INC. AND ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF PROMATS, ...

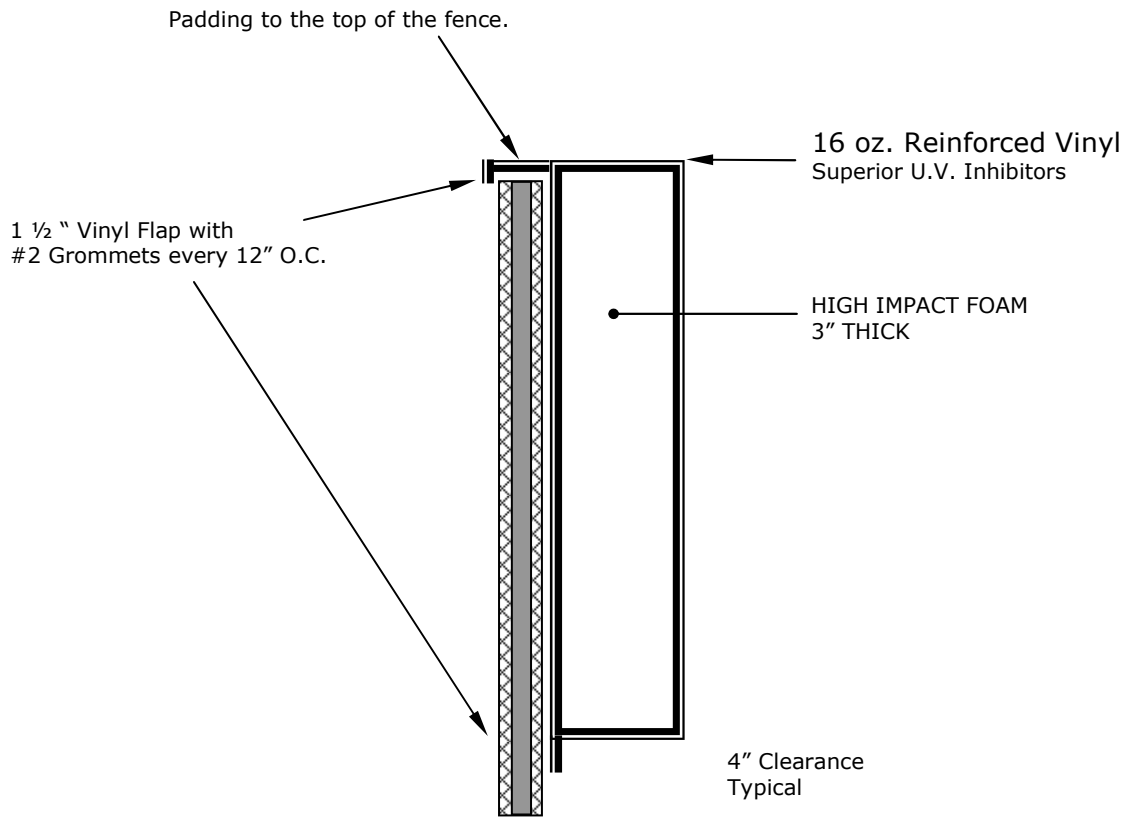

**Field Wall Padding Specifications:  
Sewn Wall Padding (FWPSG)**

Application: Concrete, Wood Walls, Chain Link Fence  
Vinyl Covering: 16 oz. per sq. yard laminated vinyl, unbalanced coating. Fabric: 1000 Denier Polyester Basic Fabric, Tear Strength Test: Warp 85 lbs., Fill 83 lbs., Tensile Strength: Warp 221 lbs., Fill 216 lbs., Weft Insertion: 9 x 9, Superior UV inhibitors, Cold Crack: Minus 20 degrees Fahrenheit, Class A flame retardant. Colors per manufacturer's standard selection, as selected by Architect. Vinyl cover is stitched using 6 lb. Bonded polyester thread, color: Black.  
Filler Foam for sewn wall pads: 3" thick High Impact Foam.  
Attachment: 1 1/2" Vinyl flap with #2 grommets every 12" O.C. at top and bottom of pad. Attached to fence using 14" nylon ties, 50 lb. break. Attached to wall using concrete anchors or wood screws.

March 27, 2007
<b>Sewn Wall Pad (FWPSG)</b>
NOT TO SCALE



Post Office Box 508  
 Fort Collins, CO 80522-0508  
 800-678-6287  
 FAX 970-482-7740

Drawn By:
Drawing #:

Project Name: