


Royal Blue	Sky Blue	Navy	Grey		Red	Purple	Black	White	Burgundy	
Gold	Orange	Beige	Forest Green	Kelly Green						

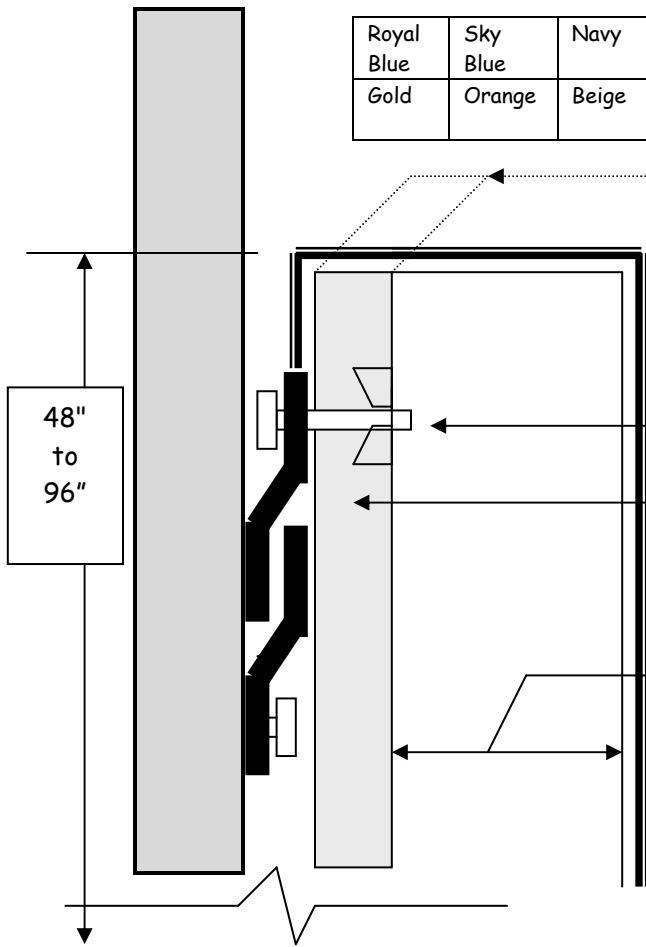

Standard Width of a Panel is 2 Feet


14 oz Vinyl (colors above)
Fire Retardant

$\frac{1}{4}$ " x $\frac{3}{4}$ " Galvanized Steel Bolt with
 $\frac{1}{4}$ " Threaded Washer Insert

$\frac{7}{16}$ " Oriented Strand Board

Foam Core - Fire Retardant Foam
2" thick

Area of
Detail

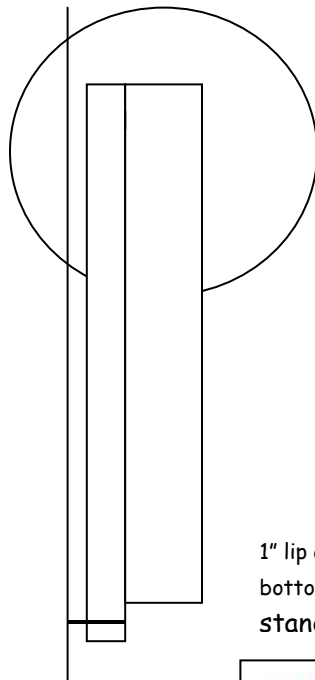

1" lip at
bottom is
standard

Field Wall Padding Specifications:

Plywood Backed Pads for Interior Use (WZFR)
Application: Masonry or Wood Walls. CLASS A Fire Retardant

Vinyl Cover: 14 oz. Vinyl, Leather Grain appearance.
Vinyl. 1300 Denier Polyester Base Fabric.
Tear Strength 93 x 83 Strip Tensile 365 x 348
Anti-fungal, Flame Resistant: Meets ASTM E84
Cover is wrapped around the backside of the plywood and is stapled every 3" with galvanized steel staples.

Plywood: $\frac{7}{16}$ " Oriented Strand Board

Attachment: One Pair of 18 ga. Galvanized metal "Z" Clips are used to mount the pads to the wall. "Z" Clips are mounted by $\frac{1}{4}$ " bolts screwed into threaded washer inserts. The wall "Z" Clips are fastened with an appropriate anchor (provided by installer) for each wall type. Z Clip on top and 1" lip on the bottom standard.

Foam Core: Glued to the OSB backing NEOPRENE 2" Polychloroprene Latex Compound 45-65 ILD "firm"

ProSafe padding from Promats is a Class A Tested wall pad. Johns Manville testing lab, Denver, CO. Tested in Feb. 2002
Flame Spread < 25 with an actual score of 9.1
Smoke Density < 450 with an actual score of 272.8

April 5, 2007

Plywood Backed Wall Mats (WZFR) "Z" Clip
CLASS A Fire Rating

Drawing 1 of 1
Revision:



Post Office Box 508
Fort Collins, CO. 80522-0508
(970) 484-2500 800-678-6287
Facsimile: (970) 482-7740

Drawn By:
D#:

Property of Promats, Inc. May not be reproduced without written permission.

Project Name:
*