


Royal Blue	Sky Blue	Navy	Grey		Red	Purple	Black	White	Burgundy	
Gold	Orange	Beige	Forest Green	Kelly Green						

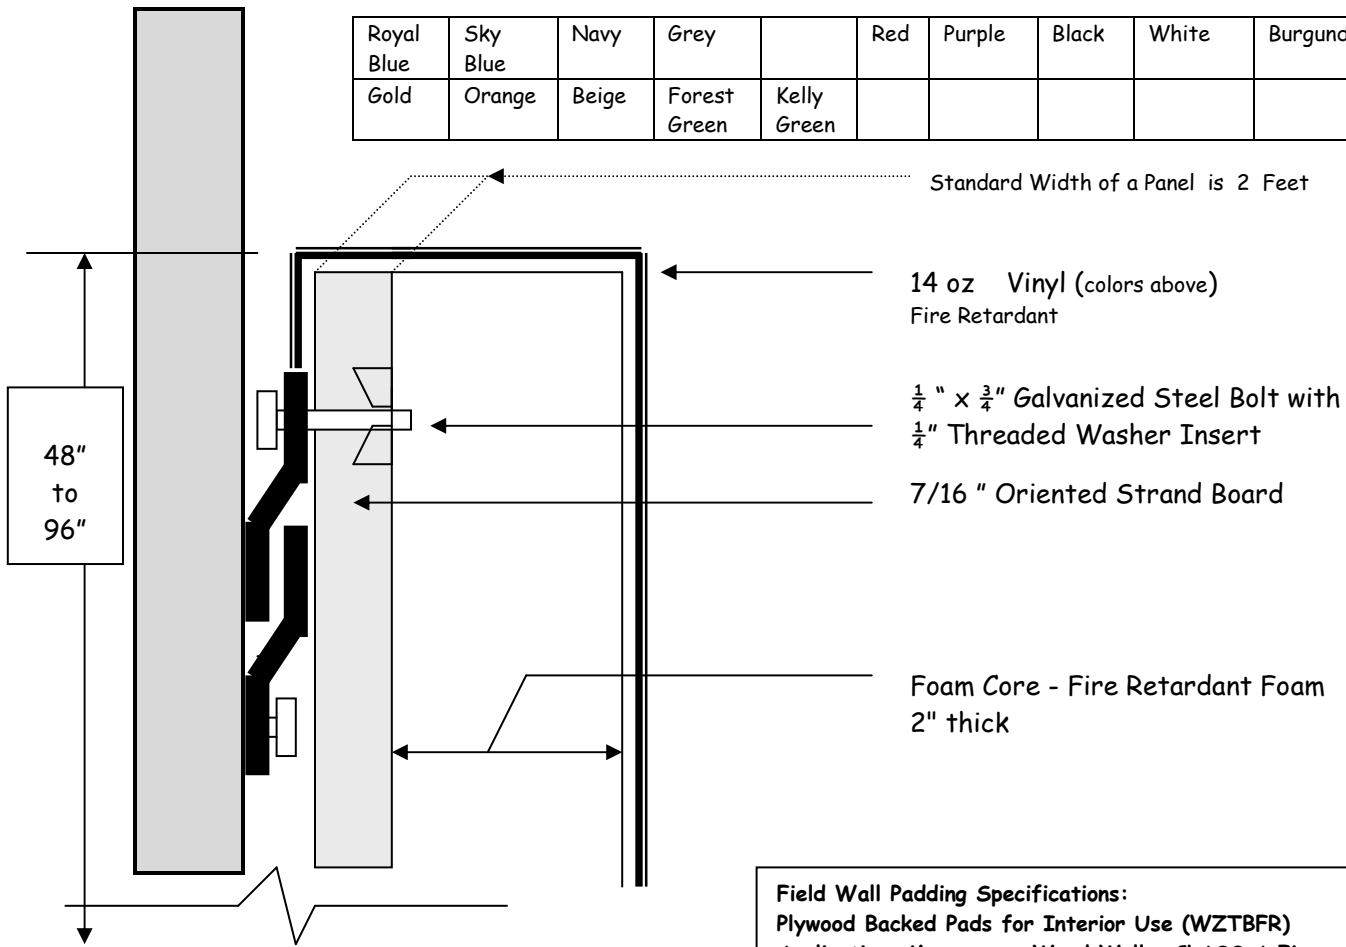

Standard Width of a Panel is 2 Feet


14 oz Vinyl (colors above)  
Fire Retardant

$\frac{1}{4}$  " x  $\frac{3}{4}$  " Galvanized Steel Bolt with  
 $\frac{1}{4}$  " Threaded Washer Insert

$\frac{7}{16}$  " Oriented Strand Board

Foam Core - Fire Retardant Foam  
2" thick

Area of  
Detail

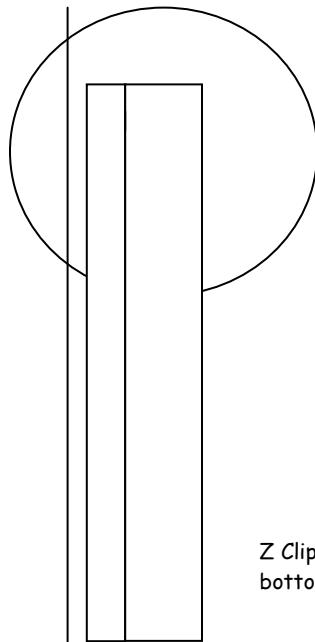

Z Clip  
bottom also

**Field Wall Padding Specifications:**

**Plywood Backed Pads for Interior Use (WZTBFR)**  
Application: Masonry or Wood Walls. CLASS A Fire Retardant

**Vinyl Cover:** 14 oz. Vinyl, Leather Grain appearance.  
Vinyl. 1300 Denier Polyester Base Fabric.  
Tear Strength 93 x 83 Strip Tensile 365 x 348  
Anti-fungal, Flame Resistant: Class A  
Cover is wrapped around the backside of the plywood and is stapled every 3" with galvanized steel staples.

**Plywood:**  $\frac{7}{16}$ " Oriented Strand Board

**Attachment:** TWO Pair of 18 ga. Galvanized metal "Z" Clips are used to mount the pads to the wall. "Z" Clips are mounted by  $\frac{1}{4}$ " bolts screwed into threaded washer inserts. The wall "Z" Clips are fastened with an appropriate anchor ( provided by installer) for each wall type. Z Clip on top / bottom

**Foam Core:** Glued to the OSB backing  
2" Polychloroprene Latex Compound 45-65 ILD "firm"

ProSafe padding from Promats is a Class A Tested wall pad.  
Johns Manville testing lab, Denver, CO. Tested in Feb. 2002  
Flame Spread < 25 with an actual score of 9.1  
Smoke Density < 450 with an actual score of 272.8

April 5, 2007

Plywood Backed Wall Mats (WZTBFR) "Z" Clip

CLASS A Fire Rating

Drawing 1 of 1

Revision:



Post Office Box 508  
Fort Collins, CO. 80522-0508  
(970) 484-2500 800-678-6287  
Facsimile: (970) 482-7740

Drawn By:

For :

Property of Promats, Inc. May not be reproduced without written permission.

Project Name: